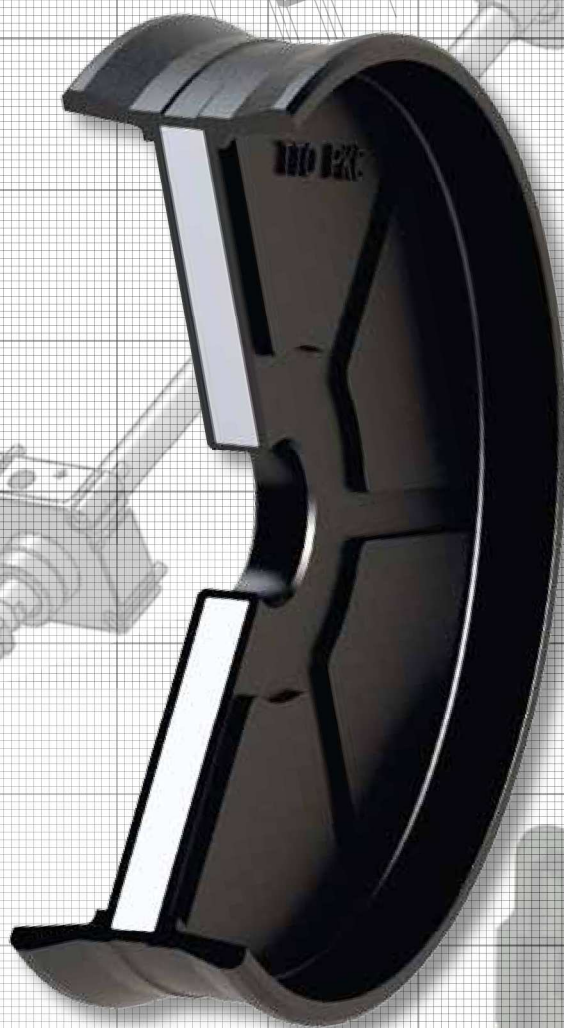














**Guarnizioni per pneumatica**  
*Pneumatic packings*  
*Joints pneumatiques*



**OT Seals S.r.l.** - Via Pitagora, 1 - 42048 Rubiera (RE) ITALIA  
Tel. 0039 0522 622711 - Fax 0039 0522 622707  
CF e P.IVA 02755260961 - [info@otseals.it](mailto:info@otseals.it) - [www.otseals.it](http://www.otseals.it)

Sealing Technical Products

Profili Profile Profils	Tipi Types Types	Denominazione Designation Désignation	Materiale Material Matériau	Pressione Bar Pression	Temperatura °C Temperature °C Température °C	Velocità m/s Speed m/s Vitesse m/s
	<b>PKC</b>	<b>Pistone pneumatico completo</b> Complete pneumatic piston Piston pneumatique complet	<b>NBR</b> Metallo Metal Métal	<b>10</b>	<b>-30 / +100</b>	<b>≤ 1</b>
	<b>RCA</b>	<b>Raschiatore bidirezionale con aggancio</b> Double acting wiper with clamp Racleur bidirectionnel à clip de retenue	<b>TPU</b>	<b>≤ 16</b>	<b>-35 / +80</b>	<b>≤ 1</b>
	<b>BCG</b>	<b>Raschiatore bidirezionale con gradino</b> Double acting wiper with shoulder Racleur bidirectionnel à épaulement	<b>TPU</b>	<b>≤ 16</b>	<b>-35 / +80</b>	<b>≤ 1</b>
	<b>RBP</b>	<b>Raschiatore bidirezionale</b> Double acting wiper Racleur bidirectionnel	<b>TPU</b>	<b>≤ 16</b>	<b>-35 / +80</b>	<b>≤ 1</b>
	<b>RCG</b>	<b>Raschiatore con gradino</b> Wiper with shoulder Racleur à épaulement	<b>TPU</b>	<b>-</b>	<b>-35 / +80</b>	<b>≤ 1</b>
	<b>GSP</b>	<b>Guarnizione stelo</b> Rod seal Joint de tige	<b>TPU</b>	<b>≤ 20</b>	<b>-35 / +80</b>	<b>≤ 1</b>
	<b>GPP</b>	<b>Guarnizione pistone</b> Piston seal Joint de piston	<b>TPU</b>	<b>≤ 20</b>	<b>-35 / +80</b>	<b>≤ 1</b>
	<b>AMM</b>	<b>Anello smorzatore</b> Damper seal Bague antivibratoire	<b>TPU</b>	<b>≤ 20</b>	<b>-35 / +80</b>	<b>≤ 1</b>
	<b>MRB</b>	<b>Fascia guida</b> Guide ring Bague d'usure	<b>PTFE con cariche</b> with fillers chargé	<b>-</b>	<b>-50 / +200</b>	<b>5</b>
	<b>A803</b>	<b>Guarnizione pistone</b> Piston seal Joint de piston	<b>NBR</b>	<b>10</b>	<b>-30 / +100</b>	<b>≤ 1</b>

Per ulteriori informazioni, potete richiedere il Catalogo Tecnico, disponibile anche online: [www.otseals.it](http://www.otseals.it)

For further information, please ask for the Technical Catalogue, also available online: [www.otseals.it](http://www.otseals.it)

Pour ultérieures informations, veuillez nous demander notre Catalogue Technique, disponible même sur internet: [www.otseals.it](http://www.otseals.it)